




## PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> : G01R 31/36</p>	<p>A2</p>	<p>(11) International Publication Number: WO 98/53335</p> <p>(43) International Publication Date: 26 November 1998 (26.11.98)</p>
<p>(21) International Application Number: PCT/FI98/00424</p> <p>(22) International Filing Date: 20 May 1998 (20.05.98)</p> <p>(30) Priority Data: 972135 20 May 1997 (20.05.97) FI</p> <p>(71)(72) Applicant and Inventor: JOKINEN, Usko [FI/FI]; Pl 1, FIN-00641 Helsinki (FI).</p> <p>(74) Agents: OLLIKAINEN, Rauno et al.; Leitzinger Oy, Ruoholahdenkatu 8, FIN-00180 Helsinki (FI).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b></p> <p><i>In English translation (filed in Finnish). Without international search report and to be republished upon receipt of that report.</i></p>

(54) Title: CONDITION MONITORING SYSTEM FOR BATTERIES

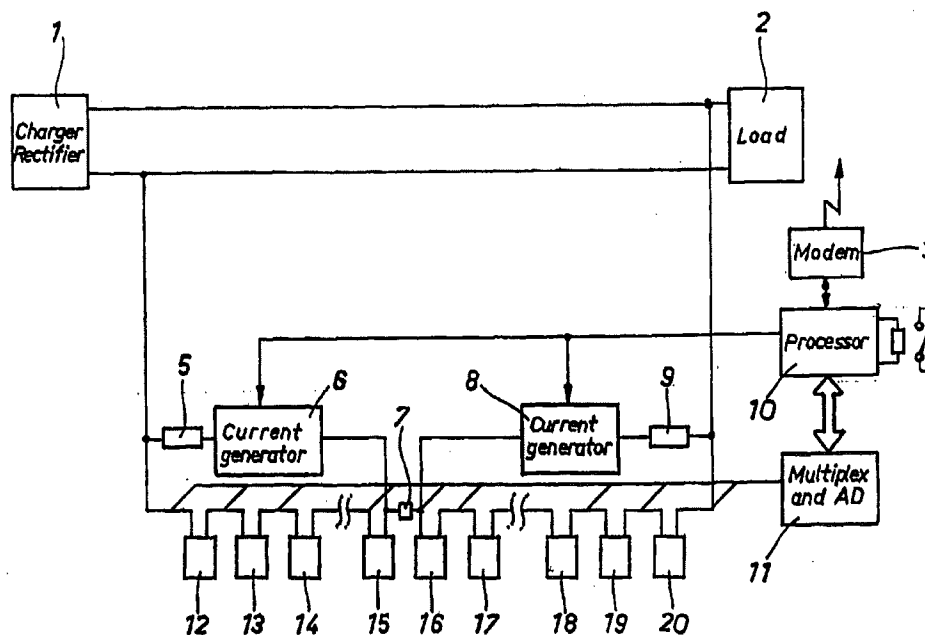

**(57) Abstract**

The invention relates to a control system of battery health. One or more cells of a float charged battery are shunted periodically through the current generator (6, 8) or switch and resistor (7). The system measures impedance and/or state of charge by measuring the change in cell voltage during a shuntperiod or between sequel shuntperiods.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

WO 98/53335

PCT/FI98/00424

1

# Condition monitoring system for batteries

The invention relates to a control system of battery health, which is used to  
5 measure the impedance and/ or state of charge of the cells of a battery.

Batteries are used to ensure the supply of energy in important systems when  
breakdown has occurred. The safety equipment of energy generation and  
distribution, computers, equipment used in telecommunication, are examples of  
10 this kind of systems, traffic-related security equipment, critical equipment in  
hospitals and in the back-up systems of lighting.

The condition of batteries is ensured by regular maintenance. The normal  
method of maintenance carried out 2-4 times a year is measuring the cell  
15 voltages and specific gravities in float charging situations. A load test is  
performed once in 1-3 years. In addition the connections and internal corrosion  
of a battery are normally measured by impedance and conductance  
measurements. The difficulty in using Valve Regulated Lead Acid Batteries  
(VRLA-) is the high variation of cell voltage. Another difficulty is related to the  
20 drying-up of a cell causing the voltage increase and is compensated by  
sulfatization causing a voltage decrease. Therefore the voltage measurement  
does not necessarily tell anything of battery health. Measuring impedance and  
conductance are normally used as methods of maintenance, although the  
correlation between these two and the battery health is not 100 percent. In  
25 addition a high deviation even in cells of the same series and a strong  
temperature coefficient make it difficult to interpret the readings. In VRLA-  
batteries also the so-called thermal runaway, which is caused by the negative  
coefficient between gas voltage and temperature is a big problem especially  
when old and cheap chargers lacking temperature compensation are used.  
30

The load tests carried out on a regular basis make sure the battery is healthy.  
By comparing the increased impedance the test interval may be lengthened.  
The measurement of impedance and conductance by using the normal 4-wire-

system (separate wires for current and voltage) requires the removing of the covers. Getting a good connection simultaneously in both the current and the voltage probe is difficult. Oxygated lead surface may give incorrect readings if the probe does not penetrate leadoxid surface.

5

The US patent document 5,214,385 recognizes the system of battery health, in which the state of charge is measured by using a separate power supply. In this case the measurement effects the total battery voltage and load voltage. The system is not used to measure impedance. The system used in the present invention according to the following description does not need a separate power supply, whereby the measurement does not effect the total battery voltage nor the load voltage. In addition the system of the present invention enables the measurement of state of charge alone or together with impedance measurement.

15

When the cell is charged electrical energy is used in a chemical reaction, in which leadsulfate becomes leadoxid and lead. When the cell is fully charged energy is used break down water. The gas forming on the electrodes increases cell voltage which in return decreases the float current. The total voltage of a battery is adjusted to a level (Stationary lead batteries typically 2.23 volts per cell) on which even the worst cell remains fully charged. In practice this means a continuous overcharging that shortens the lifetime of the cells.

20

One of the targets of the invention is to create a system that can be used in the follow-up of the battery health, especially used in the measurement of the internal corrosion based on impedance measurement and/ or the measurement cells' state of charge. This target is reached by a system based on the following the patent claim 1. Another target is to create a system that enables it is possible to maintain battery cells' state of charge using a charge voltage slightly lower than the one used normally. This prevents the overcharging of the cells that lengthens the lifetime of the cells. This target is reached by using a system following the patent claim 2. The patent claim 3, which is not independent describes a low-cost way to carry out the invention.

30

WO 98/53335

PCT/FI98/00424

3

In the following an embodiment of the invention is described by referring to the enclosed drawing, which demonstrates the block diagram describing this invention.

- 5 The battery containing cells 12-20 is connected to charger 1 in float charge. Cells 12-15 can be shunted by current generator 6 and cells 16-20 can be shunted by current generator 8. When some of the cells in float charge are shunted their cell voltage decreases while the voltage of the other cells increases. The total voltage of the battery does not change. By measuring the
- 10 changes in cell voltage resulting from the shunt's switch-on, the cell impedance is found out. By following the voltage change by sampling during numerous shuntperiods the cells' gas voltage and state of charge is found out.

- Protection resistors 5 and 9 have been calculated to stand a short circuit of a
- 15 full battery. The current's shunt resistor 7 is not necessary but when used one can lower the accuracy of the current generators. Instead using the current generators 6, 8 it is possible to use also relay-controlled switches. The battery may be divided also more than two shuntblocks. On the other hand the invention can be used as a single shuntblock version.

20

The basic principle of the invention is shunting a single or multiple cell by current generators 6, 8 in which case the cell voltage change implies the state of charge. During each shunt period a number samplings take place. The frequency of shunt periods may be for example 3 Hz.

25

- The system based on this invention enables measurement of impedance and finding out the state of charge of a single cell or a whole block of cells both field-operated or remote-controlled. In a fixed installation the current generators 6, 8 can be used to give an equalization charge. The processor 10 performs a
- 30 signal processing to find out the state of charge according to the measurements and switches on the current generator or switch to shunt the cells that are not charged. In this manner the battery can be held in just the right state of charge. If a continuous need to charge is detected, the processor

WO 98/53335

PCT/FI98/00424

4

gives an alarm through an alarm out-put. When a low charged cell is detected, one of the current generators 6, 8 can be left on for certain time (for example 10 minutes) and measure the state on charge in repetition and repeat the cycle until the cell is fully charged. In this way one avoids continuous overcharging.

5

The readings are transferred through multiplexer and AD-converter 11 to processor 10. The system can be connected to remote monitoring through modem 3 or the information may be downloaded to a data collector through the modem connector. The system saves the measurements and information of the additional charge. When the network breaks down one automatically saves the time, duration and the measurements (voltages, currents and temperatures, etc.).

The wiring may also be done, in which case current generators 6, 8, multiplexer/ AD-converter 11 and processor 10 are in the data collector unit. In this way the float current, cell voltages, impedances and the state of charge are collected in the data collection unit. In the most simple case a separate pair of current generators and data collection unit provided with probes may be used.

The voltage of charger 1 may be adjusted to a lower level, because all the cells may be kept fully charged by current generators 6, 8. This enables also the use of old chargers with VRLA-batteries, because thermal runaway caused by overcharging does not occur.

# Claims

1. A system for battery health, in which the cells' impedance and/ or state of charge is measured, c h a r a c t e r i z e d by the fact that when the battery is  
5 in floating state one or more of its cells (12-15; 16-20) is shunted through current generator (6, 8) or through the switch and resistor (7) and by the fact that the system measures changes in cell voltage by sampling during a shuntperiod.
- 10 2. A system for battery health, by which the batteries are kept in the correct state of charge, c h a r a c t e r i z e d by the fact that when the battery is in floating state one or more of its cells (12-15; 16-20) is shunted through current generator (6, 8) or through the switch, in which case the unshunted cells get an equalization charge.  
15
3. A system according to patent claim 1 or 2, c h a r a c t e r i z e d in that the system includes two or more current generators (6, 8) or at least two switches, which are connected between battery poles and a connection point between cells, making it able to shunt alternatively the separate cells of a battery by  
20 current generators (6, 8) or by switches
4. A system according to patent claim 1, c h a r a c t e r i z e d in that the batteries are held in the correct state of charge according to the measurements by shunting one or more floating cells (12-15; 16-20) through the current  
25 generator (6, 8) or through the switch causing the unshunted battery cells to get an equalization charge.

WO 98/53335

PCT/FI98/00424

1/1

